


INF-NVL-EFF-20F-1

Quick Reference

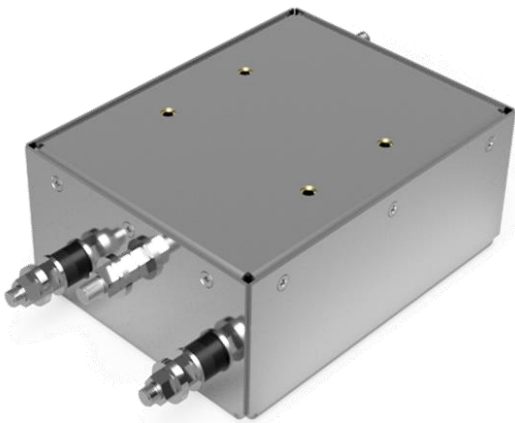

Product Description

The INF-NVL-EFF-20F-1 is a single-phase dual-stage EMI filter, designed to ensure high performance within the conducted emissions limits set by MIL-STD-461. The INF-NVL-EFF product line has been designed to be highly efficient in the low frequency spectrum covered by the CE102 standard.

All devices in the INF-NVL-EFF series are made of AISI 302 steel, in order to make them resistant to corrosion. Furthermore, the devices are designed to resist shock and vibration according to the MIL-810 standard. The completely resin-coated filter inside, guarantees protection against dust and water jets in all directions. The INF-NVL-EFF-20F-1 provides customers with the following outstanding features.

- Rated currents from 1 to 20A
- Two-stage filter
- Very high differential and common-mode attenuation

Technical & Configuration Specifications

Maximum continuous operating voltage	<ul style="list-style-type: none"> • 115VAC, 60Hz; • 240VAC, 60Hz;
Operating frequency	50/60 Hz;
Rated currents	1 to 20A @ 40°C max.
High potential test voltage	P → PE 250VAC for 2 sec
Recommended Storage Thermal Condition	-20°C to +70°C
Recommended Operating thermal condition	Operating: 0°C to +45°C
Not Operational Humidity	5 ~ 95% (non-condensing)
Operational Humidity	0 ~ 80% (non-condensing)
Design certified to	IEC/EN 60939 (applies to AC and DC applications)
IP Grade	IP54
MTBF @ 40°C	520,000 hours at 20A
Flammability corresponding to:	UL 94V-2 or better
Certifications	CE - Reach - RoHS
Design to meet	<ul style="list-style-type: none"> • MIL-HDBK-2036 • MIL-STD-810G • MIL-STD-167-1A • MIL-STD-461G

Shock and Vibration Specifications

Design to Meet	
NON-OPERATIVE SHOCK	<ul style="list-style-type: none"> MIL-STD-810G Meth. 516.2 30g – 11 ms Half sine – X, Y, Z axis (non-operative shock)
OPERATIVE SHOCK	<ul style="list-style-type: none"> MIL-STD-810G Meth. 516.2 15g – 11 ms Half sine – X, Y, Z axis
VIBRATION	<ul style="list-style-type: none"> MIL-STD-167-1A TYPE 1 - Frequency 2–14 (Hz) Amplitude 0.25 mm peak - Frequency 15-100 (Hz) Amplitude 0.2 g peak

Tabella 1-Shock and Vibration Specifications

Typical Electrical Schematic:

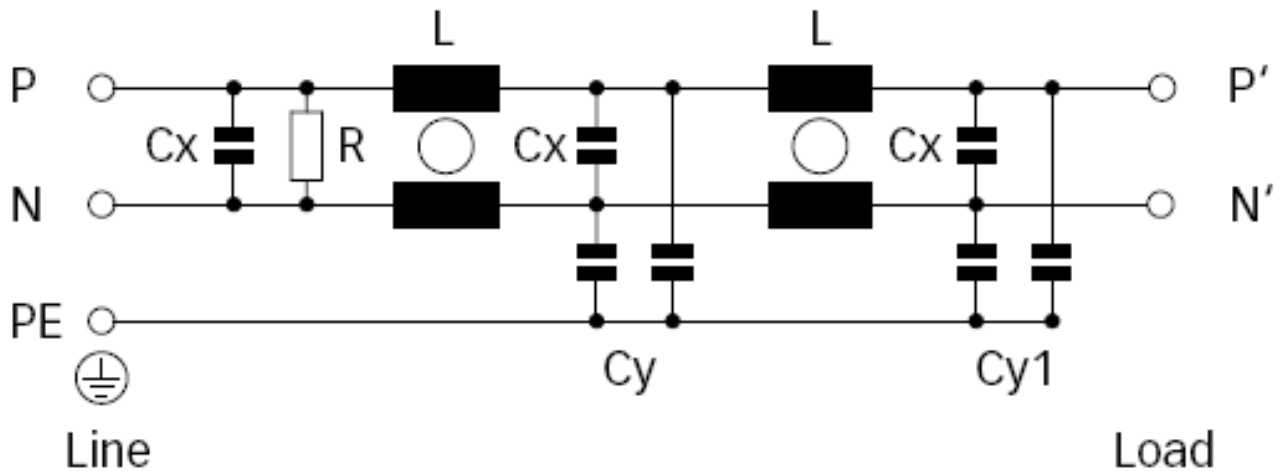


Figure 1 – Electrical Schematic

Dimensions

INF-NVL-EFF-20F-1

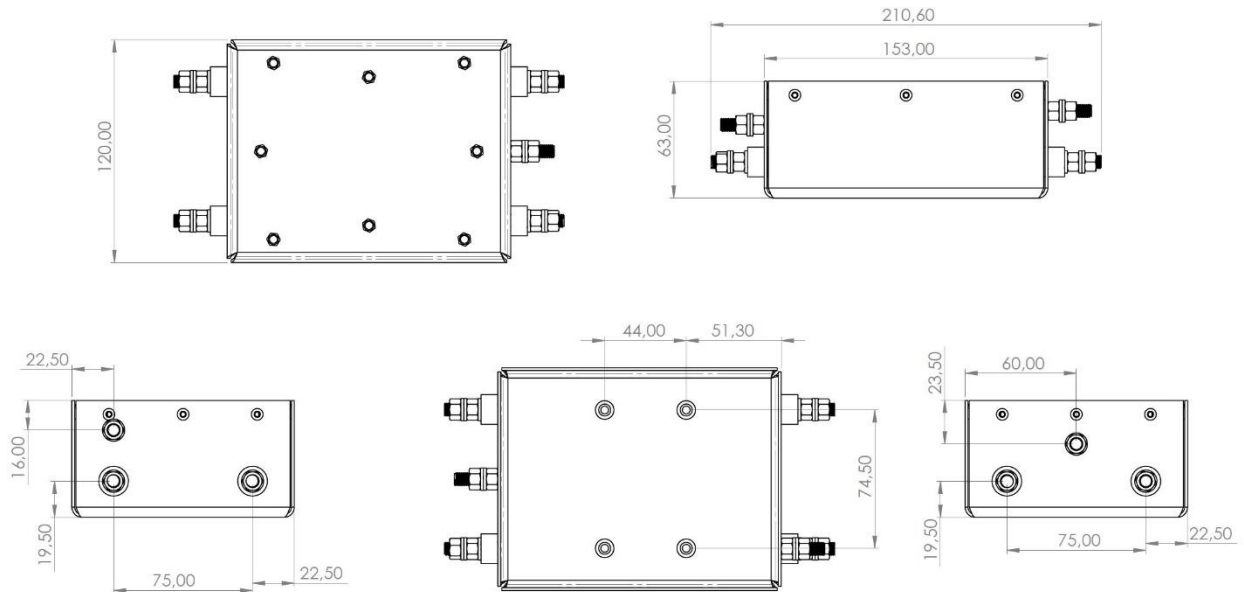


Figure 2 – Design and Dimensions

	L [mm]	W [mm]	H [mm]	WEIGHT [kg]
INF-NVL-EFF-20F-1	210.6	120	63	≤ 2

NOTA:

- Tutte le misure sono soggette a una tolleranza di ± 1 mm

Filter Attenuation

INF-NVL-EFF-20F-1

CISPR 17:

- Curve A: 50Ω/50Ω sym Differential Mode
- Curve B: 50Ω/50Ω asym Common Mode
- Curve C: 0.1Ω/100Ω sym Differential Mode
- Curve D: 100Ω/0.1Ω sym Common Mode

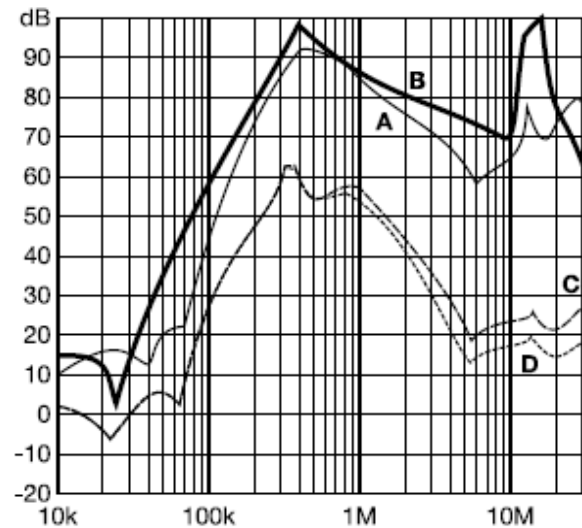


Figure 3 – Attenuation Limits

List of Revisions

Rev.	Date	Pages Effected	Description
0	4 th of October 2023	1-6	Original issue
1	12 of October 2023	1-7	Table insertion: Shock and Vibration specifications
2	31 of January 2024	1-7	Review of drawing, dimensions and weight tolerance

The content of this document must be considered intellectual property of Infodata S.p.A. The information contained herein is subject to change without notice. The only warranties for Infodata products and services are set accordingly with Italian regulation. Infodata S.p.A. shall not be liable for technical or editorial errors or omissions contained herein.

Last review: January 2024